

# How to Engage

**1** Start by engaging the plank on the long side (angle-system) at 25° - 30° angle




**2** Slide the plank until it reaches the short side of the next plank



**3** Let the plank drop gently



**4** Press with your thumb on both ends of the short side

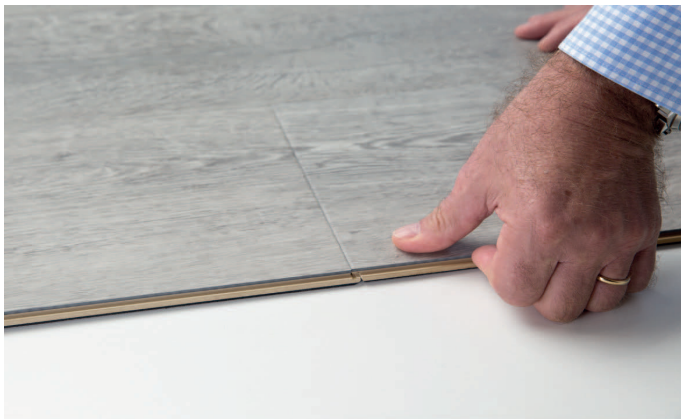

**5** Continue pressing until the two planks are flush along the end joints



**6** Planks are now fully locked



Please note that hard materials are best installed with a soft-faced hammer

Technical Support: 423-794-0601